

January 2018

## A Data-Driven Approach For Detecting Autism Spectrum Disorders

Manika Kapoor

David Anastasiu

*San Jose State University*, [danastasiu@scu.edu](mailto:danastasiu@scu.edu)

Follow this and additional works at: [https://scholarworks.sjsu.edu/computer\\_eng\\_pub](https://scholarworks.sjsu.edu/computer_eng_pub)



Part of the [Data Storage Systems Commons](#), and the [Medicine and Health Sciences Commons](#)

---

### Recommended Citation

Manika Kapoor and David Anastasiu. "A Data-Driven Approach For Detecting Autism Spectrum Disorders"  
*The 2018 Grace Hopper Celebration Conference (2018)*.

This Presentation is brought to you for free and open access by the Computer Engineering at SJSU ScholarWorks. It has been accepted for inclusion in Faculty Publications by an authorized administrator of SJSU ScholarWorks. For more information, please contact [scholarworks@sjsu.edu](mailto:scholarworks@sjsu.edu).



# A Data-Driven Approach For Detecting Autism Spectrum Disorders

Manika Kapoor and David C. Anastasiu



## Introduction

- **Objective:** Predict Autism Spectrum Disorders (ASD) and characterize the type of stimuli needed for its detection.
- **Why?:**
  - No cure exists, but early diagnosis increases the chances of patients to function properly in society.
  - Current methods are either subjective or based on responses to single stimulus
- **How?:**
  - Creating machine learning based models using Electrocardiogram (ECG) and Skin Conductance (SC) data.



- **What is ASD?**
  - Neurodevelopmental disorder in which patients display diminished capacity of social interaction.
  - Instruments used for ASD assessment are lengthy to administer and are also not accurate.

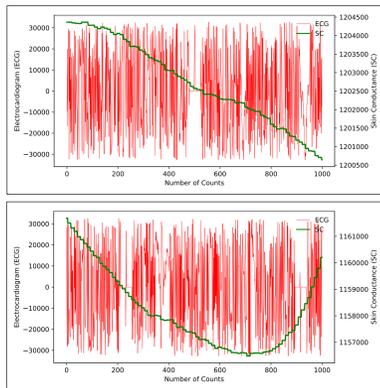


Fig1: Sample Dataset

- **Dataset:**
  - Collected during Sensory Challenge Protocol (SCP) [1].
  - Reactions to multiple stimuli were observed from 25 children with ASD and 25 Typically Developing (TD) children (5-12 years age).
  - Time taken for each protocol: 45–90 minutes.
  - Included three phases: baseline, sensory challenge, and recovery.
  - **Baseline and Recovery periods:** 3 minutes with no stimulation.
  - **Sensory Challenge:** 6 stimuli, each administered for 3 seconds and was presented at least 8 times.
  - **Six Stimuli:**
    - Auditory tones (at 84 dB)
    - Visual cues (20W strobe light at 10Hz)
    - Auditory siren sound (at 78 dB)
    - Olfactory (wintergreen oil passed under the nose)
    - Tactile (touch along the jaw bone a feather)
    - Vestibular (chair tilted back to a 30 degree angle)

## Hypothesis and Supporting Evidence

- **Hypothesis:**
  - We hypothesize that autistic children are greatly affected by certain sensory stimulation and thus may take longer to return to normal state.
  - In contrast, TD children can quickly recover to a normal state after the sensory trial.

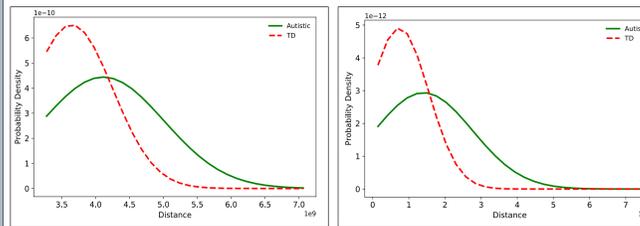


Fig2: Normal Distribution of Baseline and Recovery Distance using EKG (left) and SC (right) data

- **Evidence:**
  - Compare the sensory data recorded during **baseline** stage and during the **recovery** stage.
  - No stimulus was administered during either rest stages.
  - Compute the Euclidean DTW distance of the ECG and SC time series recorded during the rest periods.
  - Euclidean DTW is the distance between two time-dependent sequences which may have different speeds and length.
  - Mean distance for the autistic children is **approximately 60% more** than that for the TD children.

## Methods

- **Feature Extraction:**
  - Transform data for each stimulus into a form that is representative of the data but enables efficient analysis.
  - Three methods:
    - **Equal Width Partition (EWP):** SCP has stimuli administered in specific number of contiguous trials. Divide each stimulus data into 'n' equal parts and then take
      - mean and standard deviation of each split.
      - slope and intercepts of peaks and slope and intercepts of valleys in ECG and slope and intercept in SC data.

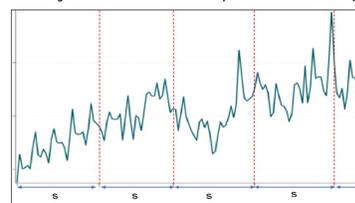


Fig3: Equal Width Partition

- **Dynamic Time Warping (DTW):**
  - Identify similar patterns in two time series even if one of them is stretched out.
  - Calculate the DTW Euclidean distance between ECG and SC data of every subject with every other subject.
  - Working with huge time-series is computationally very expensive, so we divide the data for each stimulus into 8 equal parts with 10% data points from the neighboring splits.

## Methods

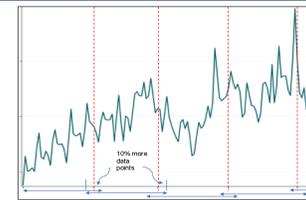


Fig4: Initial Splitting for DTW Experiments

- **Motif Based Segmentation (MBS):**
  - Represent each stimulus using motifs.
  - Calculate Euclidean distance between ECG and SC data of every subject with every other subject.

- **Developing Predictive Models for Autism Detection:**
  - Binary classification problem.
  - Built eight different types of models, namely:
    - K-Nearest Neighbors (KNN)
    - Support Vector Machine (SVM)
    - Random Forest (RF)
    - DTW-based KNN model (DTW-KNN)
    - Motif-based KNN model (M-KNN)
    - Decision Tree (DT)
    - Naive Bayes (NB)
    - XGBoost (XGB)
- **Degree with which each stimulus affects Autistic children:**
  - Contribution of each stimulus towards predicting autism in children.
  - Use Stochastic Gradient Descent (SGD) to find appropriate weights for each stimulus for predicting autism in children.

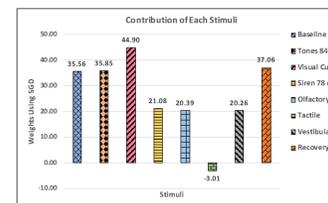


Fig5: SGD Result

## Results and Conclusions

- Using EWP, the best model accuracy achieved is **93.33%** by XGBoost model created using only SC data and using slope and intercept of represent each partition.

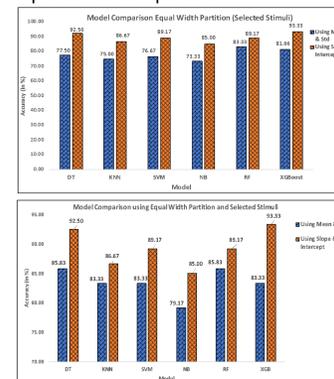


Fig6: Model Accuracy Comparison using Equal Width Partition

- Using **MBS**, the best accuracy achieved is **95.83%** by KNN model built using both SC and ECG data.
- Using **DTW**, the best accuracy achieved is **77.50%** by the KNN model built using both SC and ECG data.

## Results and Conclusions

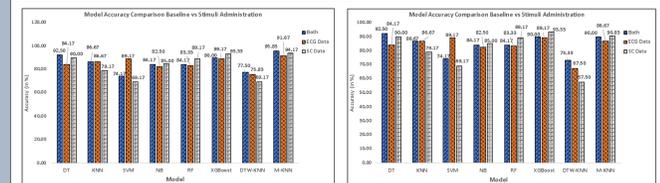


Fig7: Overall Model Accuracy Comparison

- Stimuli application helps in predicting ASD.
- Without stimuli application, best accuracy achieved is **82.50%** which increases to **95.83%** after stimuli application.

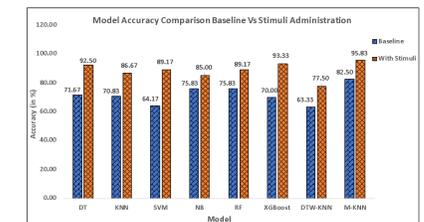


Fig8: Baseline vs Stimuli Application Comparison

- Stimuli contributing towards best performing model are: **Baseline, Tones 84dB, Visual Cues, Siren 78dB, Olfactory & Vestibular.**

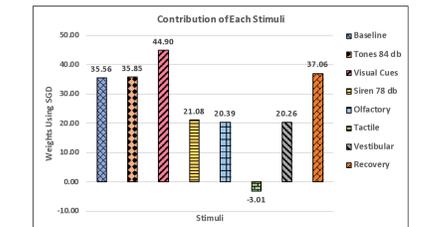


Fig9: Contribution of Each Stimuli Towards Best Performing Model

- DTW being one of the best approaches to compare time-series data in general, doesn't perform satisfactorily with huge time-series data and is computationally very expensive, taking **3x** the amount of time to train and **450x** time to predict as compared to the best model.
- The best performing model i.e. M-KNN takes on an average **18.8 hours** to train and approximately **30 seconds** to make predictions.

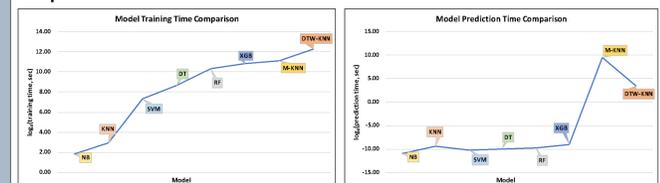


Fig10: Model Time Efficiency Comparison

## Key References

- [1] M. C. Chang, L. D. Parham, E. I. Blanche, A. Schell, C.-P. Chou, M. Dawson, and F. Clark, "Autonomic and behavioral responses of children with autism to auditory stimuli," American Journal of Occupational Therapy, vol. 66, no. 5, pp. 567–576, 2012, doi:10.5014/ajot.2012.004242.
- [2] Anastasiu, David C., Chang Megan C., & Kapoor Manika (2018). A Data-Driven Approach for Detecting Autism Spectrum Disorders. In *Big Data (Big Data), 2018 IEEE International Conference*. IEEE.(under review)